

Directive Systems & Engineering

2702 Rodgers Terrace
Haymarket, VA 20169-1628

www.directivesystems.com

703-754-3876

33cm Loop Yagi, Model DSE3319LYA

SPECIFICATIONS

Frequency Range:	910-928 MHz
Number of elements:	19
Boom Length:	72 inches
Boom diameter:	1 inch
Mast diameter:	1 1/2-inch max.
Weight:	4 pounds
Connector:	Type N female
Gain:	16.5 dBi
3 dB Beamwidth (E Plane):	=30°
F/B ratio:	>20 dB
Maximum Power:	550 W. average
Stacking Distance:	
H Plane	21 1/2 in. vertical
E Plane	24 in. horizontal

Note: All hardware is Stainless Steel unless otherwise noted

Anti-Seize Compound - Apply a small amount of the supplied Anti-Seize Compound to the aluminum joints and to the threads of the U-Bolts to prevent galling.


BEFORE INSTALLING YOUR NEW ANTENNA, PLEASE BE SURE TO READ THE ENCLOSED WARNING PAMPHLET.

ASSEMBLY INSTRUCTIONS

- 1) Unpack antenna and locate the hardware package. Boom is broken between directors 9 & 10. Remove D9 and slide boom pieces together to alignment marks. Replace D9.
- 2) Install the 3/4" square BM Bracket to the boom with the 2" screws & nuts provided. It should straddle D9. Bolt the mast plate to the BM bracket with the 1 1/4" screws. Insert the U-bolt in the Boom to Mast Plate.
- 3) Straighten any misaligned elements and tighten hardware if necessary. **But do not touch R1, DE or D1, as these have been factory set for minimum SWR.**



**HORIZONTAL
POLARIZATION**
(Can be up or down)

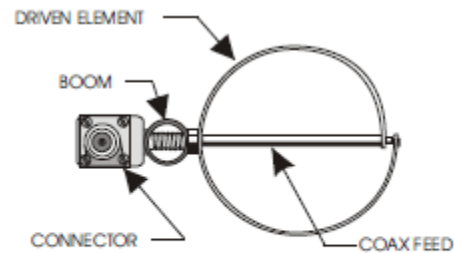

**VERTICAL
POLARIZATION**
(Can be left or right)

- 4) Attach the feed line, and tape it to the mast. The connector should be sealed with electronic grade RTV or equivalent.
- 5) As shipped, the antenna SWR will be less than 1.5:1. Additional tweaking can be accomplished by adjusting the distance between the driven element and R1 and D1, or by adjusting the shape of the driven element. **NOTE: Do not attempt this adjustment unless the proper equipment and qualified personnel are available.**
- 6) If antennas are to be stacked, see "Instructions for Stacking Loop Yagis".

DO NOT, UNDER ANY CIRCUMSTANCES, APPLY ANY TYPE OF SEALANT OR COATING TO THE DRIVEN ELEMENT, T-ARMS OR CONNECTOR ASSEMBLY, OTHER THAN KRYLON® CLEAR COAT. ANY OTHER COATING WILL ADVERSELY AFFECT THE SWR AND VOID YOUR WARRANTY.

Directive Systems Warranty Policy

All Directive Systems antennas are built with the finest materials available. We take great pride in building a quality product that will give years of good service and performance. If there is a defect in materials or workmanship within 90 days of purchase, Directive Systems will repair or replace the defective part, free of charge, to the original purchaser. **DO NOT RETURN ANYTHING WITHOUT PRIOR AUTHORIZATION FROM DIRECTIVE SYSTEMS.** Please contact us either by phone or email describing the problem and we will work to resolve it.

If, after examining a new antenna you received, you are not satisfied, contact us immediately for return authorization and refund. **ANY ANTENNA THAT HAS BEEN MODIFIED WILL BE SUBJECT TO A RESTOCKING CHARGE. IF AN ANTENNA IS SO MODIFIED AS TO MAKE IT UNUSABLE, DIRECTIVE SYSTEMS RESERVES THE RIGHT TO REFUSE TO ACCEPT THE ANTENNA FOR RETURN.**