

# Directive Systems & Engineering

2702 Rodgers Terrace  
Haymarket, VA 20169-1628

www.directiveystems.com  
703-754-3876

## 33 Element 7.4 wl. K1FO Designed Yagi, Model DSEFO432-33

### ELECTRICAL SPECIFICATIONS

Frequency range: MHz ..... 432-433  
 Gain: dBd..... 17.8  
 Impedance: Ohms..... 50  
 Connector type..... Type N(F)  
 Front -to- back ratio: dB..... 23  
 SWR: Typical at resonance..... 1.2:1  
 Beamwidth: degrees  
     E- Plane ..... 18°  
     H- Plane ..... 18.6°  
 Sidelobe level: decibels  
     E- Plane ..... -17  
     H- Plane ..... -16  
 Power rating, Continuous: Watts ..... 1500  
 Stacking Distance: ft. (m)  
     E- Plane..... 83" (2.1m)  
     H- Plane..... 81" (2.05m)

### MECHANICAL SPECIFICATIONS

Boom length: in. (m.)..... 24'4" (5.26)  
 Turning radius: in. (m.)..... 14'3" (2.90)  
 Weight Assembled: Lbs (kg.)..... 12.5 (3.86)  
 Max mast size: in. (cm.)..... 2" (5.08)  
 Wind surface area: sq ft (m. ) ..... 2.75 (.13)  
 Wind Survival: Mph (km/hr)..... 90+ (160)

### PARTS LIST

*All hardware is Stainless Steel, unless otherwise noted.*

Boom			
1" OD x 0.058" x 63" rear	1		(match colors)
w/coax/balun assy. attached			
1 1/8" OD x 0.058" x 65" rear mid	1		(match colors)
1 1/4" OD x 0.058" x 59.5" center	1		(match colors)
1 1/8" OD x 0.058" x 60.5" front mid	1		(match colors)
1" OD x 0.058" x 65.5" front	1		(match colors)
Boom Sag			
3/4" OD x 0.058" x 65"	2		
5/8" OD x 0.058" x 48"	1		
5/8" OD x 0.058" x 36"	1		

Element bundle		Boom Sag Hardware	
3/16" Elements	32	Boom Sag Bracket	2
Driven Element	1	2" Long tangent U-bolt	1
Brass T-arms	2	2" Saddle	1
		Aluminum spacer	2
		10-32 Machine screw	2
		10-32 NyLock® nut	2
		5/16" Split lock washer	2
		5/16" Flat washer	6
		5/16" Hex nut	2
		5/16" NyLock® nut	2
		3/4" Hose clamp	2
Hardware Bag		Boom to Mast Hardware Bag	
T-arm Shorting Bars	2	5/16" x 2" U-bolt	2
Hex Wrench	1	2" Saddle	2
8-32 x 1 1/2" Machine screw	2	5/16" Nut	4
8-32 x 1 3/8" Machine screw	2	5/16" Split lock washer	4
#8 Split Lock washers	4	1/4" x 1 1/2" U-bolt	2
#8 Nuts	4	1 1/2" Saddle	2
1 1/4" Hose Clamps	4	1/4" Nut	4
3/16" Element insulators	68	1/4" Split lock washer	4
3/16" Keepers	70	1/4" Flat washer	4
Boom to Mast plate	1		
Anti-Seize Compound	1		
Element assembly tool	1		
Assembly Manual	1		

**Anti-Seize Compound** - Apply a small amount of the supplied Anti-Seize Compound to the aluminum joints and to the threads of the U-Bolts to prevent galling.

**BEFORE INSTALLING YOUR NEW ANTENNA, PLEASE BE SURE TO READ THE ENCLOSED WARNING PAMPHLET.**

**CAUTION:** *While we strive to remove all burrs from all machined parts, there is always the possibility of sharp edges. We strongly suggest checking the edges and use a fine file, or 400 grit sandpaper, to remove any burrs that may have been left.*

*Tools needed: #2 Phillips screwdriver*

*1/4" flat blade screwdriver or 5/16" nut driver*

*large needle nosed pliers*

*keeper installation tool (supplied with kit)*

*ruler with metric millimeter markings*

*marking pencil*

## ASSEMBLY INSTRUCTIONS

1) The antenna components should be removed carefully from the shipping container and the individual parts counted and checked for completeness. Be careful to check all tubing pieces for elements and hardware that may be packed inside.

In the following steps, apply a small amount of the supplied Anti-Seize Compound to the joints:

2) The boom consists of five sections of tubing. The rear boom section has the driven element, connector and balun already preassembled and attached. Place a stainless steel hose clamp over the rear boom section and slide the rear boom section into the rear mid boom section, both ends marked with a black stripe. Align the holes and place an 8-32 x 1 3/8" screw, split lock washer and nut, and tighten. Slide the hose clamp over the slotted portion of the boom and tighten. Similarly, assemble the remaining boom sections, matching the color stripes on each boom. The two 8-32 x 1 3/8" screws are installed in the front and rear sections, and the two 8-32 x 1 1/2" screws are installed in the middle sections.

3) Install all of the element insulators by pressing them into the holes in the boom. They will snap in place and should not fall out. We include a couple of extras just in case!

4) The element bundle contains all of the elements needed for assembly. Take time to inventory each one and check off each dimension with Table 1. Some elements vary by 1 or 2mm in overall length, so extreme care in measuring is called for here. Arrange elements in order of descending size and mark each element with a scribe for proper location of the "keeper" (see Table 1 again and Figure 1). The reflector is the longest element, and each succeeding director is slightly shorter. DIR # 31 is the shortest. The keeper must be installed as shown in Figure 2; using the keeper installation tool supplied, slide the keeper to within a mm of the scribed line. Note that the keeper is a one-way device only. If you go past the scribed line, you must continue to the element end and start the process over. Place the first keeper on all elements.

See pictures below for keeper orientation. The front side, with the tabs going inward, is the side to push onto the element. The rear side, with the tabs going outward, is the side that faces you. It is the side that goes face down into the element tool.



Keeper Front side

Keeper Rear side

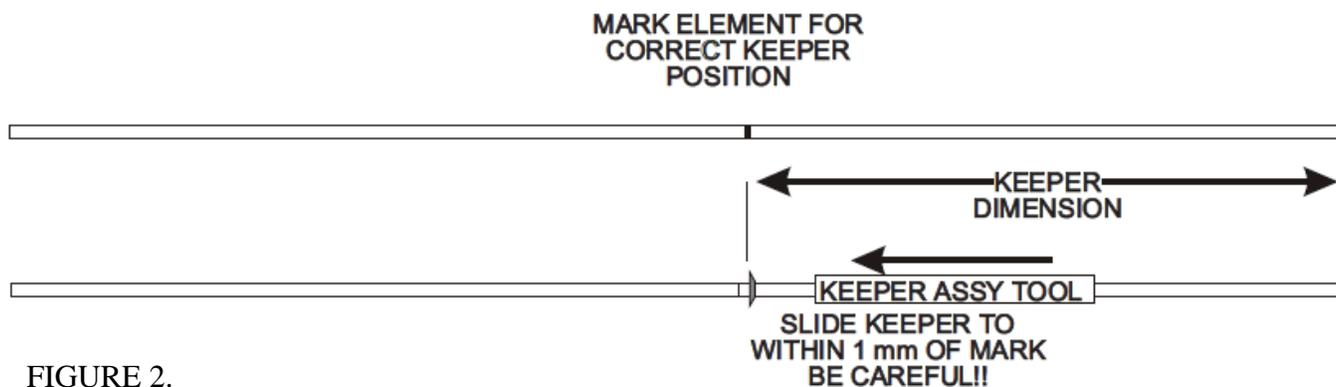


FIGURE 2.

5) You are now ready to install the elements on the boom. You must start at one end and work your way, in order, to the far end of the boom. Lay out the elements in ascending order as appropriate. Note that the driven element is brass rod, but is installed as the other elements. Insert insulators into element holes in each side of the boom at the starting end. Push element through insulator on one side about  $\frac{1}{2}$ " to set locking tabs. Now insert the element from the other side through both insulators and install the second keeper on the opposite side of the boom from the first keeper.

(See Figure 3) Check that the element is centered before you snug up both keepers. A positioning error of  $\pm 1\text{mm}$ . or  $0.040$ " is acceptable. At this point, if you tighten the keepers and the element is not centered, you will have to cut one of the keepers to remove the element and start again. Some extra keepers are supplied, but care is definitely required here. Check your work as you go! Proceed with the next element in similar fashion. Note that the driven element is brass tube, but otherwise is installed the same as the other elements. Check off each element on Table 1 to monitor your progress. Double-check element lengths one last time before final installation on the boom.

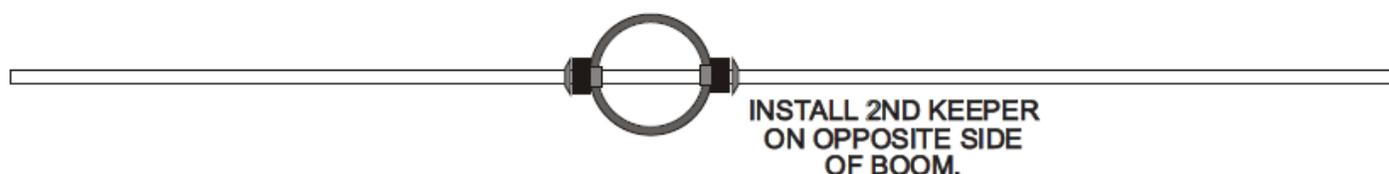


FIGURE 3.

6) The driven element and T-Match assembly are built as shown in Figure 4 and the photographs below.

7) Locate the two brass T-arms. Both are preformed-one is straight while the other is bent and on one end. Locate also the brass T-arm shorting bars, and position them on the brass driven element as shown in Figure 4.

8) Referring to photo 1, push the pre-formed T-arm into the hole in the standoff insulator which has the hole rotated up slightly for easier installation.

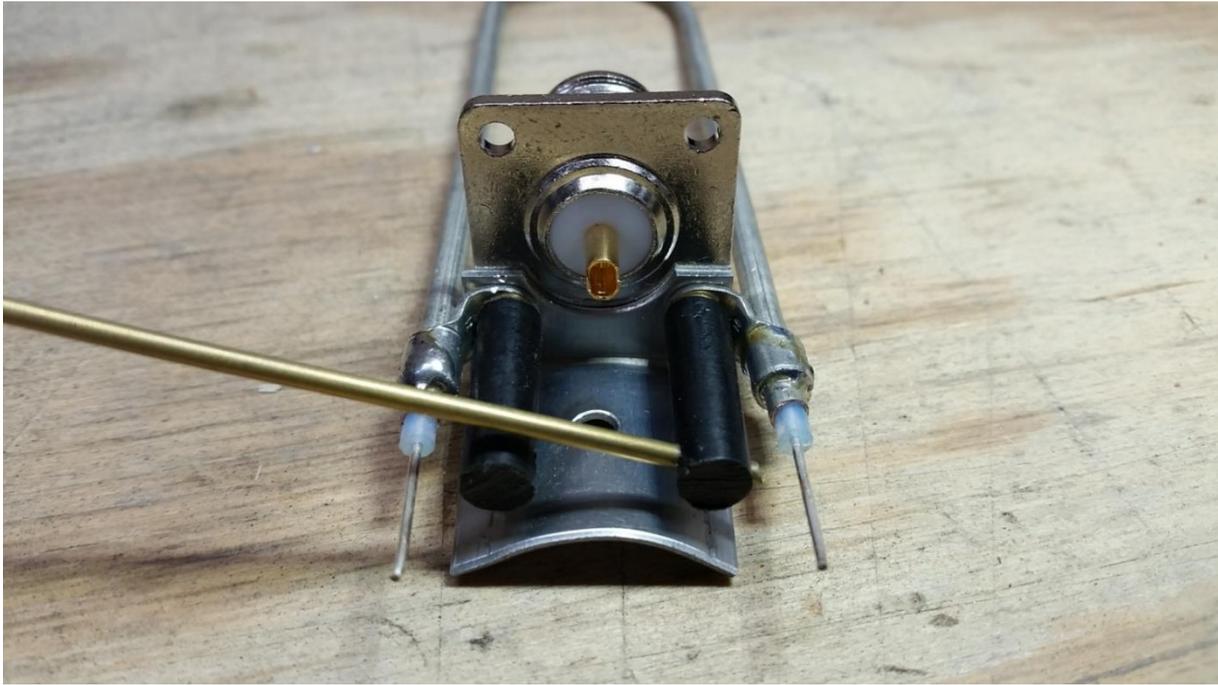


Photo 1

- 9) Push the T-arm all the way through as shown in photo 2.

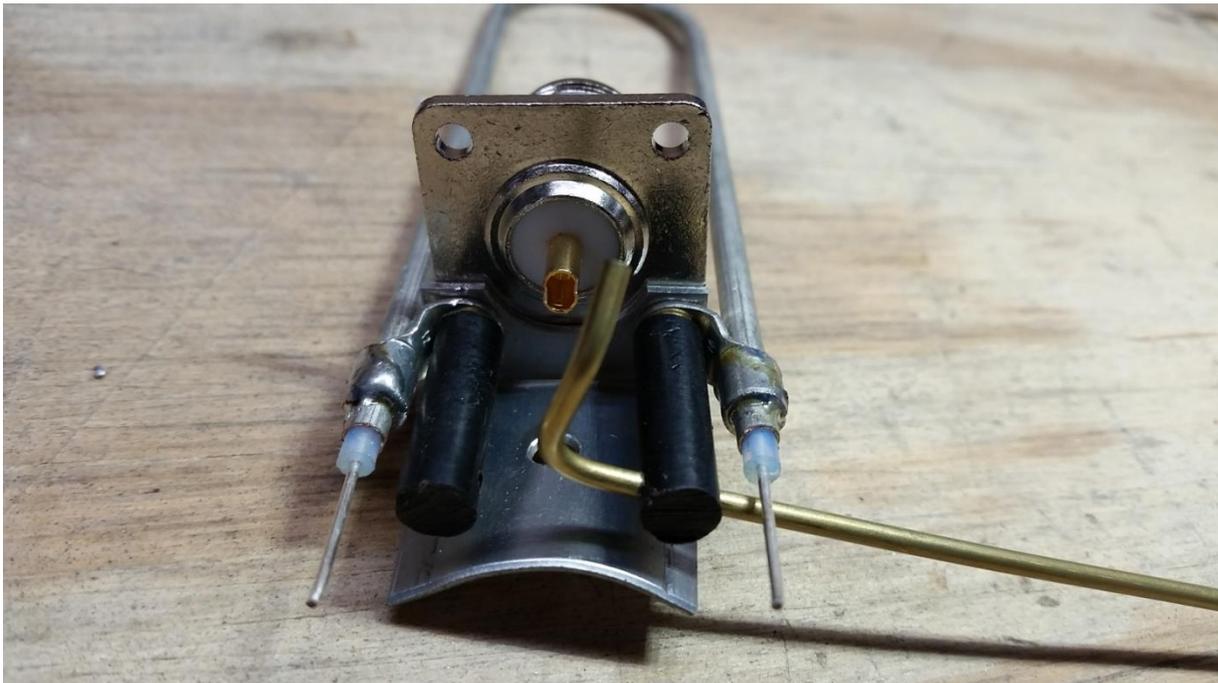


Photo 2

- 10) Once the T-arm is inserted all the way as in photo 2, slightly loosen the screw holding the insulator using a #1 Phillips screw driver.
- 11) Rotate the T-arm so the end of the T-arm fits into the solder cup on the N connector (see photo 3) and tighten the Phillips screw.

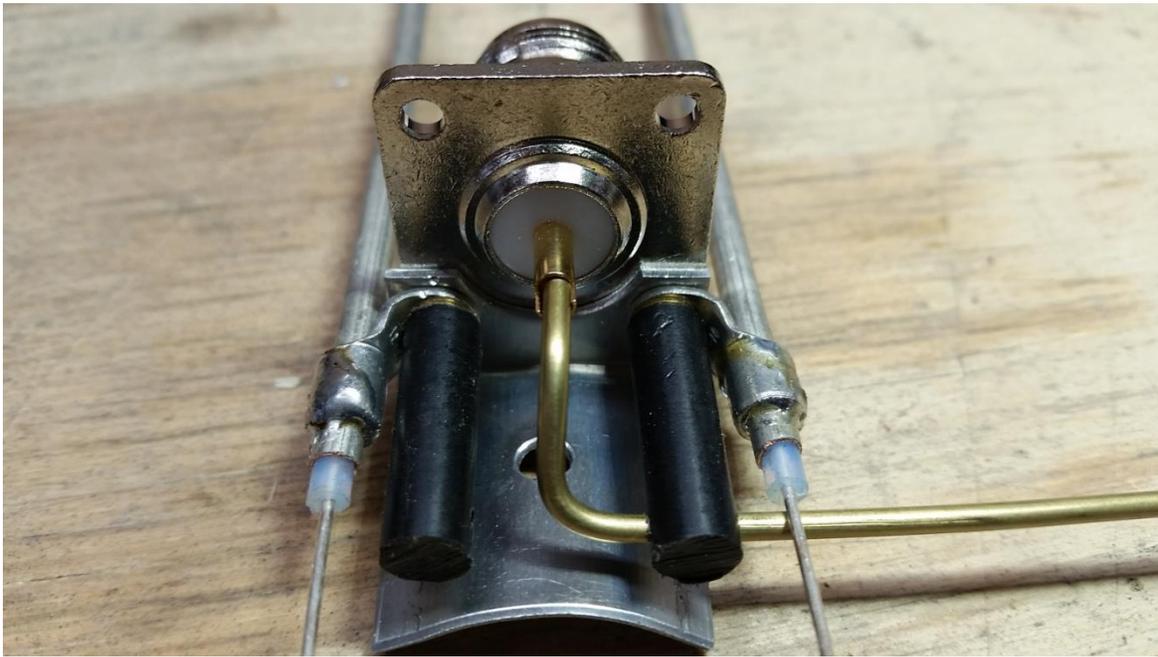


Photo 3

- 12) Next, insert the straight T-arm into the other standoff insulator until it is flush with the inside edge (see photo 4).

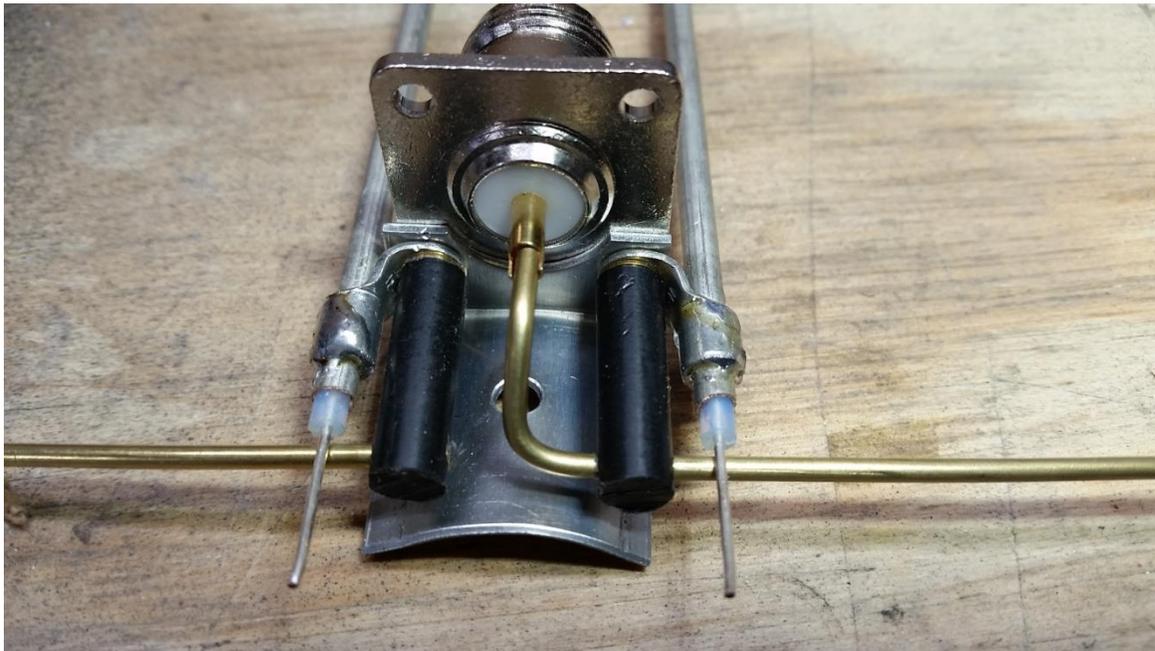



Photo 4

- 13) Last, wrap the balun center conductor around the T-arms and solder (see photo 5)



Photo 5

14) Slide the T-match bars over the driven element and T-arms. Measuring from the boom to the inside of the shorting bar, the dimension below is a good starting point; however, to ensure the minimum SWR at your operating frequency, we recommend using an antenna analyzer or SWR bridge to obtain the lowest SWR. Note: The ends of the T-arms that extend past the shorting bars can be bent up toward the driven element, or down away from the driven element to obtain the best SWR. If bending the T-arms closer to the driven element makes the SWR better, remove 5 mm from each T-arm end using a large pair of wire cutters. 105-110 mm is the minimum length.

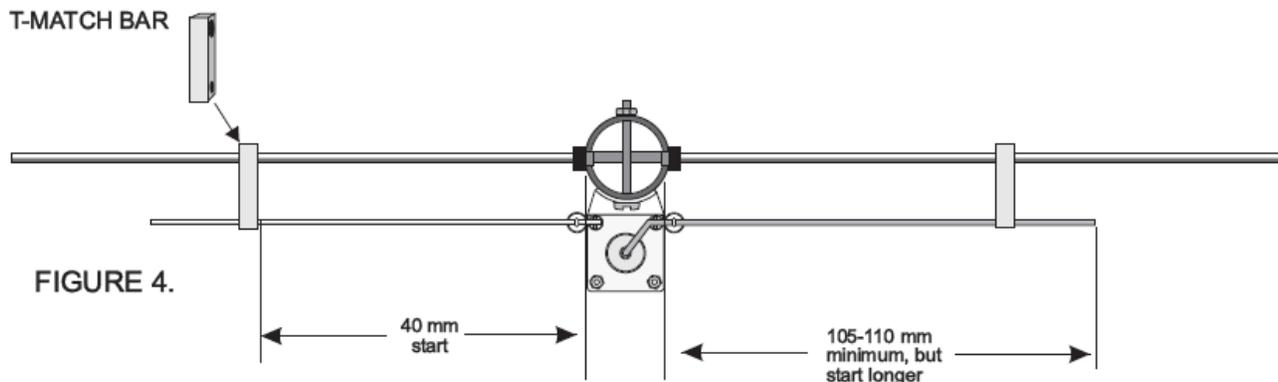

## BOOM SAG SUPPORT ASSEMBLY INSTRUCTIONS

- 15) Mount the completed antenna to a temporary mast, preferably 2" in diameter. Allow at least 30" of mast above (or below depending on which way the boom sag will go) the antenna.
- 16) Place a boom sag strap over the front and rear intermediate boom just behind the #8 screw that holds the front or rear boom sections together. NOTE: if you are going to have the boom sag supports under the antenna, place these straps just ahead the #8 bolts. By placing the straps behind the bolt, they can't slide forward from wind vibration; they will rest against the screw head and nut. Likewise, when the antenna is supported from above, placing the strap ahead of the bolt will prevent it from sliding inward. The front boom sag support goes ahead of the #8 screw if supported from above and behind if supported from below.
- 17) Place a long tangent 2" U-bolt around the mast and place a saddle over the U-bolt. If installing the antenna on a square mast, such as the DSE70-4SF, place the saddle with the groove facing outward.
- 18) Place a flat washer on next and then a 1/2" spacer on each leg of the U-bolts.
- 19) Place the longer 5/8" boom sag towards the front of the antenna with the #10 hole towards the boom sag bracket installed in step 2 and the shorter 5/8" boom sag towards the rear, once again with the #10 hole towards the bracket.
- 20) Place a 3/4" hose clamp over the slit end of the 3/4" tubes. Slide a 5/8" support tube in the 3/4" tube with the #10 hole towards the boom sag strap installed in step 2 for both the front and rear sections.
- 21) Insert a #10 x 1 1/4" screw through one side of the strap, through the 5/8" boom sag support and through the other hole in the strap. Install a #10 locking nut on the screw and tighten. Don't get the nut too tight, you want a little movement for the boom sag to align properly. The locking nut will prevent it from loosening.
- 22) Slide the 5/8" tubes into the 3/4" tubes until the antenna is flat and level. Tighten the 3/4" hose clamps using a 5/16" nut driver.
- 23) If you are installing multiple antennas, mark each boom sag so it stays with the antenna it came off of.

**If you are installing multiple antennas, please be sure that you build each antenna with the same T-Match wire orientation. In the above drawing, the center pin goes to the right hand side of the antenna as viewed from the back of the connector. Make sure both antennas do the same! Proper phase relationship is very important here!**

If you wish to check your work, now is the time to apply power to the antenna. Any workaround RF energy should be done carefully. We do not recommend standing next to an antenna with many watts of 432 MHz energy radiating around it. An MFJ 259 analyzer, Comet CAA-500 or VNA can also be used. The T-arm shorting bars may be adjusted with power applied and the point of best match can be found quickly, easily and more accurately than that with an amateur transmitter and wattmeter connected. Generally, good watt meters can reliably indicate SWR down to about 1.2:1.

The aperture of this antenna is large enough so that you must elevate the antenna a minimum of 7 feet or 2.1m above the ground. Point the antenna so that there are no "reflectors" or obstructions for 100 feet directly in front of the beam. A better method would be to point the antenna straight up toward the sky. Support the rear of the antenna on a wooden or metal pole or tube, and tie or guy the antenna boom with very light string or line. Now the driven element will be at arm level, and ground effects are removed. Most locations are pretty clear straight over head as well!

Install a short length of coax (1/2 wave is ideal... the antenna impedance will repeat each half wave from the antenna regardless of coax imperfections) between the coax connector and your bridge or wattmeter. If you are using your transmitter for an RF source, apply power and observe the reflected power. Turn off the power and adjust the T-arm shorting bars equally in small increments. 1/8" or 3mm is a good starting point. Apply power again and observe results. If it got better, keep going. If it degraded, change the direction of your T-Match movement program and recheck your SWR. At some point you will observe a null in reflected power. When you have found it, tighten the set screws on both the driven element and the T-arms with the supplied hex wrench.


Brass, copper and tin lead solder will oxidize in the weather and over the years' performance can degrade. It is a good idea to spray your handiwork with a good grade of clear paint sealant. As a general rule, the slower drying sprays tend to be more enduring. Rustoleum "Clear Seal" or Krylon clear sprays are recommended. A few light coats work better than one big one. Be sure to cover the connector before spraying.

**DO NOT, UNDER ANY CIRCUMSTANCES, APPLY ANY TYPE OF SEALANT OR COATING TO THE DRIVEN ELEMENT, T-ARMS OR CONNECTOR ASSEMBLY, OTHER THAN KRYLON® CLEAR COAT. ANY OTHER COATING WILL ADVERSELY AFFECT THE SWR AND VOID YOUR WARRANTY.**

You are now ready to install your new antenna. Be careful when you dress the coax down the boom. Keep the coax away from any elements. Tape the cable tightly and securely to the boom. The Boom-to Mast plate has V shaped grooves to fit mast sizes up to 2" maximum. The small 1/4" U bolts are used to attach the boom to the mounting plate. Use the supplied lock washers. It is a good idea to apply a small amount of the supplied anti-sieze compound to the threads under the hex nuts to prevent galling of stainless steel.

This will complete the assembly of your DSEFO432-33. The construction of this antenna will provide many years of consistent performance with no degradation of performance due to corrosion and weathering.

TABLE 1. ELEMENT TABLE

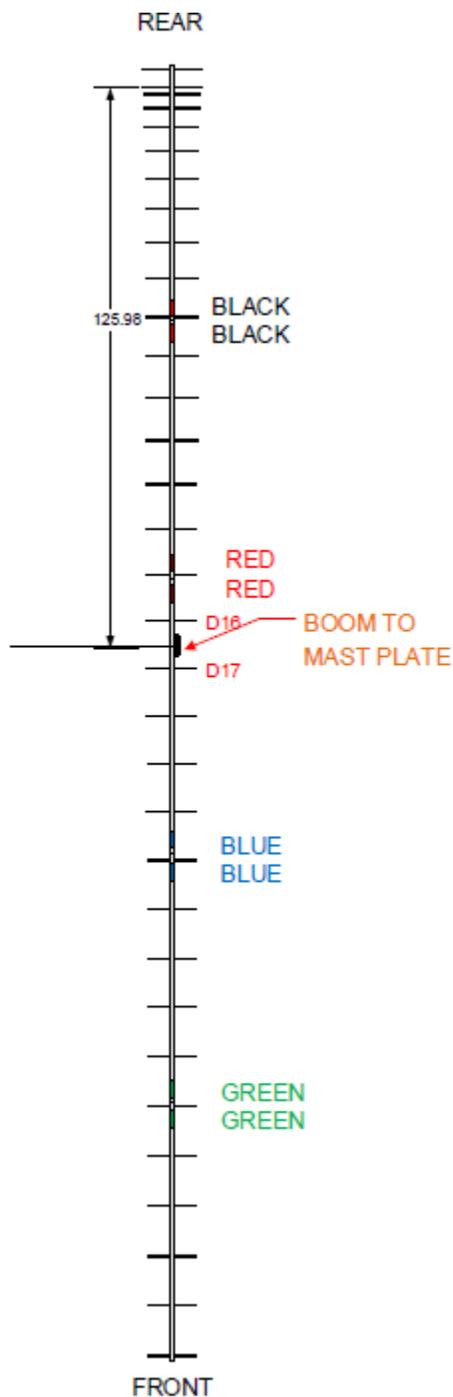

<i>Element Description</i>	<i>Element Length mm. +/- 1mm</i>	<i>Keeper Half Length mm.</i>
Reflector	348	161
Driven Element	341	158
Director #1	324	150
Director #2	313	144
Director #3	307	141
Director #4	303	139.5
Director #5	299	138
Director #6	297	136
Director #7	295	136
Director #8	293	134.5
Director #9	291	133
Director #10	290	132
Director #11	288	130.5
Director #12	287	130
Director #13	286	129.5
Director #14	285	129
Director #15	284	128.5
Director #16	284	127
Director #17	283	126.5
Director #18	282	126
Director #19	281	125
Director #20	280	124.5
Director #21	278	125.5
Director #22	278	125.5
Director #23	277	125
Director #24	277	125
Director #25	276	124
Director #26	275	125.5
Director #27	274	125
Director #28	274	125
Director #29	273	124.5
Director #30	273	124.5
Director #31	272	124

All measurements are in Millimeters.  
Lengths are +/- 1 Millimeter.

## Directive Systems Warranty Policy

All Directive Systems antennas are built with the finest materials available. We take great pride in building a quality product that will give years of good service and performance. If there is a defect in materials or workmanship within 90 days of purchase, Directive Systems will repair or replace the defective part, free of charge, to the original purchaser. **DO NOT RETURN ANYTHING WITHOUT PRIOR AUTHORIZATION FROM DIRECTIVE SYSTEMS.** Please contact us either by phone or email describing the problem and we will work to resolve it.

If, after examining a new antenna you received, you are not satisfied, contact us immediately for return authorization and refund. **ANY ANTENNA THAT HAS BEEN MODIFIED WILL BE SUBJECT TO A RESTOCKING CHARGE. IF AN ANTENNA IS SO MODIFIED AS TO MAKE IT UNUSABLE, DIRECTIVE SYSTEMS RESERVES THE RIGHT TO REFUSE TO ACCEPT THE ANTENNA FOR RETURN.**